HEALTH IS THE HEART OF OUR BUSINESS.

AMEDTEC
Medizintechnik Aue GmbH

System Solutions for

CARDIOLOGY AND PULMONOLOGY DIAGNOSTICS

High tech and Healthcare

www.amedtec.de

Everything is based on the design of a 6-lead electrocardiograph. What started about six decades ago has been carried forward by AMEDTEC Medizintechnik Aue GmbH since 1998. Building on this expertise, the company has established itself as a development service provider, equipping products from international manufacturers with hardware and software for 12-lead and Holter ECGs.
In parallel, the company focuses on the expansion of cardiopulmonary data management systems. Networks, interface integration, data exchange and interoperability between hospital IT and practice IT are clearly gaining in relevance.

AMEDTEC *ECGpro*®

With its transition to a manufacturer, AMEDTEC positions itself as a provider of holistic solutions and introduces its own system, AMEDTEC *ECGpro*® to the market.

This technology transforms ECG diagnostics and is tailored to the complexity of healthcare, high tech and data communication.
AMEDTEC *ECGpro*® is the centerpiece of AMEDTEC products, enabling data collection, analysis and exchange for 12-lead ECGs (resting and stress), Holter ECGs, ambulatory blood pressure monitoring, ergospirometry, body plethysmography and spirometry.

Quality: Made in Germany

Since 2007, AMEDTEC has showcased its market presence with its own product line. A dynamic team for sales, application and service has been built.
At the same time, the collaboration with Geratherm Respiratory has been strengthened. Today, AMEDTEC offers a full product range for cardiopulmonary function diagnostics.

The standard that drives AMEDTEC: It can always be better

AMEDTEC's system solutions and products are used in cardiopulmonary function diagnostics. This special responsibility shapes our thinking, actions and operations. That is why AMEDTEC focuses on the continued development and innovation of our technologies. Tailored to the needs and applications in clinics and practices, we manufacture powerful, user-friendly medical devices.

Because, in diagnostics, what matters most is reliable and easy operation.

The future demands solutions

AMEDTEC takes the needs of users and patients seriously. This is why we provide an excellent level of service with prompt assistance from our experienced staff. You can expect an internationally established sales and customer service network. Because only knowledge leads to medical progress.

Quality. Goes without saying

AMEDTEC maintains a consistent course: All AMEDTEC products meet the stringent standards of medical technology. Our quality management system is aligned accordingly and is certified according to EN ISO 13485. In accordance with the European Medical Device Regulation (MDR) and, in the transitional period, Directive 93/42/EEC, Annex II, AMEDTEC ensures the continuous quality of its products.

Table of Contents

06
AMEDTEC *ECGpro*®
Data Management

AMEDTEC *ECGpro*®: flexible integration into clinical or practice software using HL7, DICOM and GDT interfaces. Absolutely safe.

08
AMEDTEC *ECGpro*®
Workflow

Manage complex data intelligently: All relevant information is in the right place at the right time.

10
CardioPart 12 WLAN
Resting ECG Mobile

Can be used anywhere as a 12-lead resting and rhythm ECG in clinics and practices. Wireless, robust, ultra-mobile and hygienic.

12
CardioPart 12
Resting ECG Compact

Precision measurement technology for mobile or stationary use as a 12-lead resting and rhythm ECG. Optionally with DT80/DT100 vacuum system from Strässle.

14
CardioPart 12
Stress Test ECG

Intuitive in handling and flexible in application. Reliable ECG data acquisition via USB or Bluetooth connection.

16
Holter EP8
Long-Term ECG

Complete long-term ECG system with optimal workflow for fast and precise analysis of the Holter ECG recording.

18
Holter-RR
24h ABPM

Gentle, outpatient long-term blood pressure diagnostics and meaningful data: Because people matter.

22
Spirostik
Spirometry

Maximum patient safety through the use of disposable flow sensors. Available as Bluetooth or USB version.

26
Hardware and
Software Maintenance

The AMEDTEC maintenance contract: the best investment in your diagnostic systems.

20
Ergostik
Ergospirometry

Compact, portable and intuitive ergospirometry system with breath-by-breath technology. Meaningful measurements are guaranteed.

24
Bodystik
Bodyplethysmography

Greater patient comfort in lung function diagnostics: Easy-entry, height-adjustable tripod, glazed on all sides.

27
Service

Smart support from anywhere: We resolve technical problems quickly and reliably. Rental equipment on request.

AMEDTEC *ECGpro*®
Data Management

High level of security

Benefit from the efficiency of professional data management. AMEDTEC *ECGpro*® takes into account the sensitivity of medical diagnostics. The Microsoft SQL Server provides an advanced, solid platform for storing and recording data. All cardiopulmonary measuring stations are connected to the AMEDTEC *ECGpro*® database via high-speed data lines. Storing the data on a central server guarantees that the data is secure and that all information is available whenever it is needed. Devices that work offline synchronise automatically by replicating the data as soon as a network connection is detected. User-specific settings and the assignment of privileges or login details protect the system against unauthorised access.

Flexible integration

Economic efficiency calls for future-proof solutions. AMEDTEC *ECGpro*® ensures communication via HL7, DICOM and GDT interfaces. The data management system can be easily integrated into existing HIS, PACS or practice software environments. The AMEDTEC GDT server manages and transfers data from external systems. A data converter allows the integration of ECG recorders from almost all third-party suppliers. The ability to access ECGs from anywhere offers additional freedom and an even faster response from the doctor in urgent situations.

Our solution for this is the WebViewer for AMEDTEC *ECGpro*®. For selected manufacturers, there is an interface that makes ECG data from monitoring available for long-term ECG analysis. This is patient-friendly and reduces the length of stay in hospital.

Simpler workflows

External evaluation required? Without any risk? With Interlink, AMEDTEC *ECGpro*® ensures fast, secure transmission of recorded data or diagnostic reports via the internet.
Viewing ECG curves in other rooms during diagnostics? AMEDTEC *ECGpro*® Online transfers ongoing ECGs to all authorised workstations in real time.

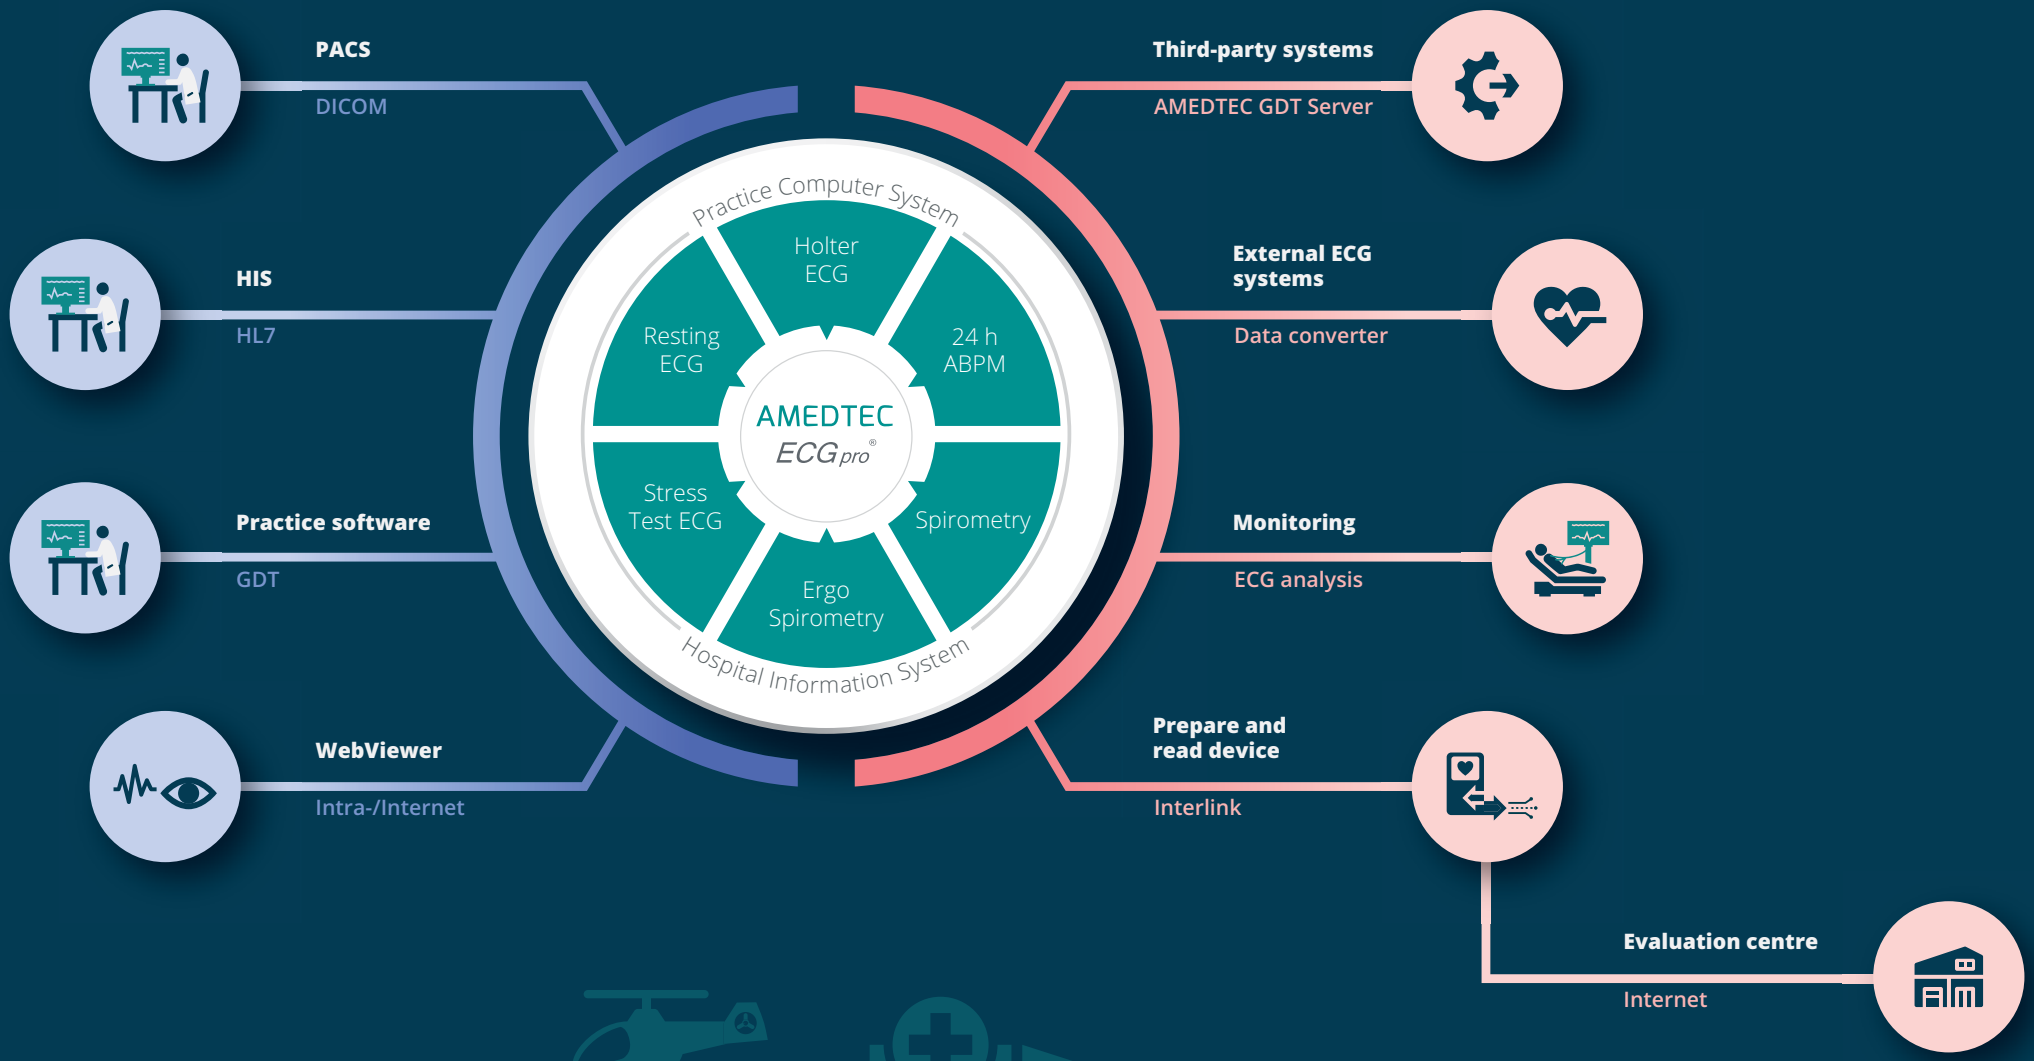
PACS
DICOM
HIS
HL7
Practice software
GDT
WebViewer
Intra-/Internet
Practice Computer System
Holter ECG
24 h ABPM
Spirometry
Ergo Spirometry
Stress Test ECG
Resting ECG
AMEDTEC ECG pro®
Hospital Information System
Third-party systems
AMEDTEC GDT Server
External ECG systems
Data converter
Monitoring
ECG analysis
Prepare and read device
Interlink
Evaluation centre
Internet

AMEDTEC *ECGpro*® Workflow

More efficient diagnostics

AMEDTEC simplifies the complexity of cardiopulmonary tests. AMEDTEC *ECGpro*® workflow directs all relevant information to the right place at the right time. It does not matter whether you work in a medical practice or hospital – the system is bi-directional, reliable and, if required, completely paperless. Examination requests (orders) can be created directly in the HIS, PACS or practice software. AMEDTEC *ECGpro*® accepts these and forwards them to the workstation or measuring station. The order is added to the worklist.

Perfectly organised

When the diagnosis is complete, the worklist is updated automatically. The results are forwarded immediately to the HIS, PACS or medical practice software. With just a few clicks, the doctor has the test results in electronic form. AMEDTEC *ECGpro*® supports case-based invoicing and enables you to archive data digitally.

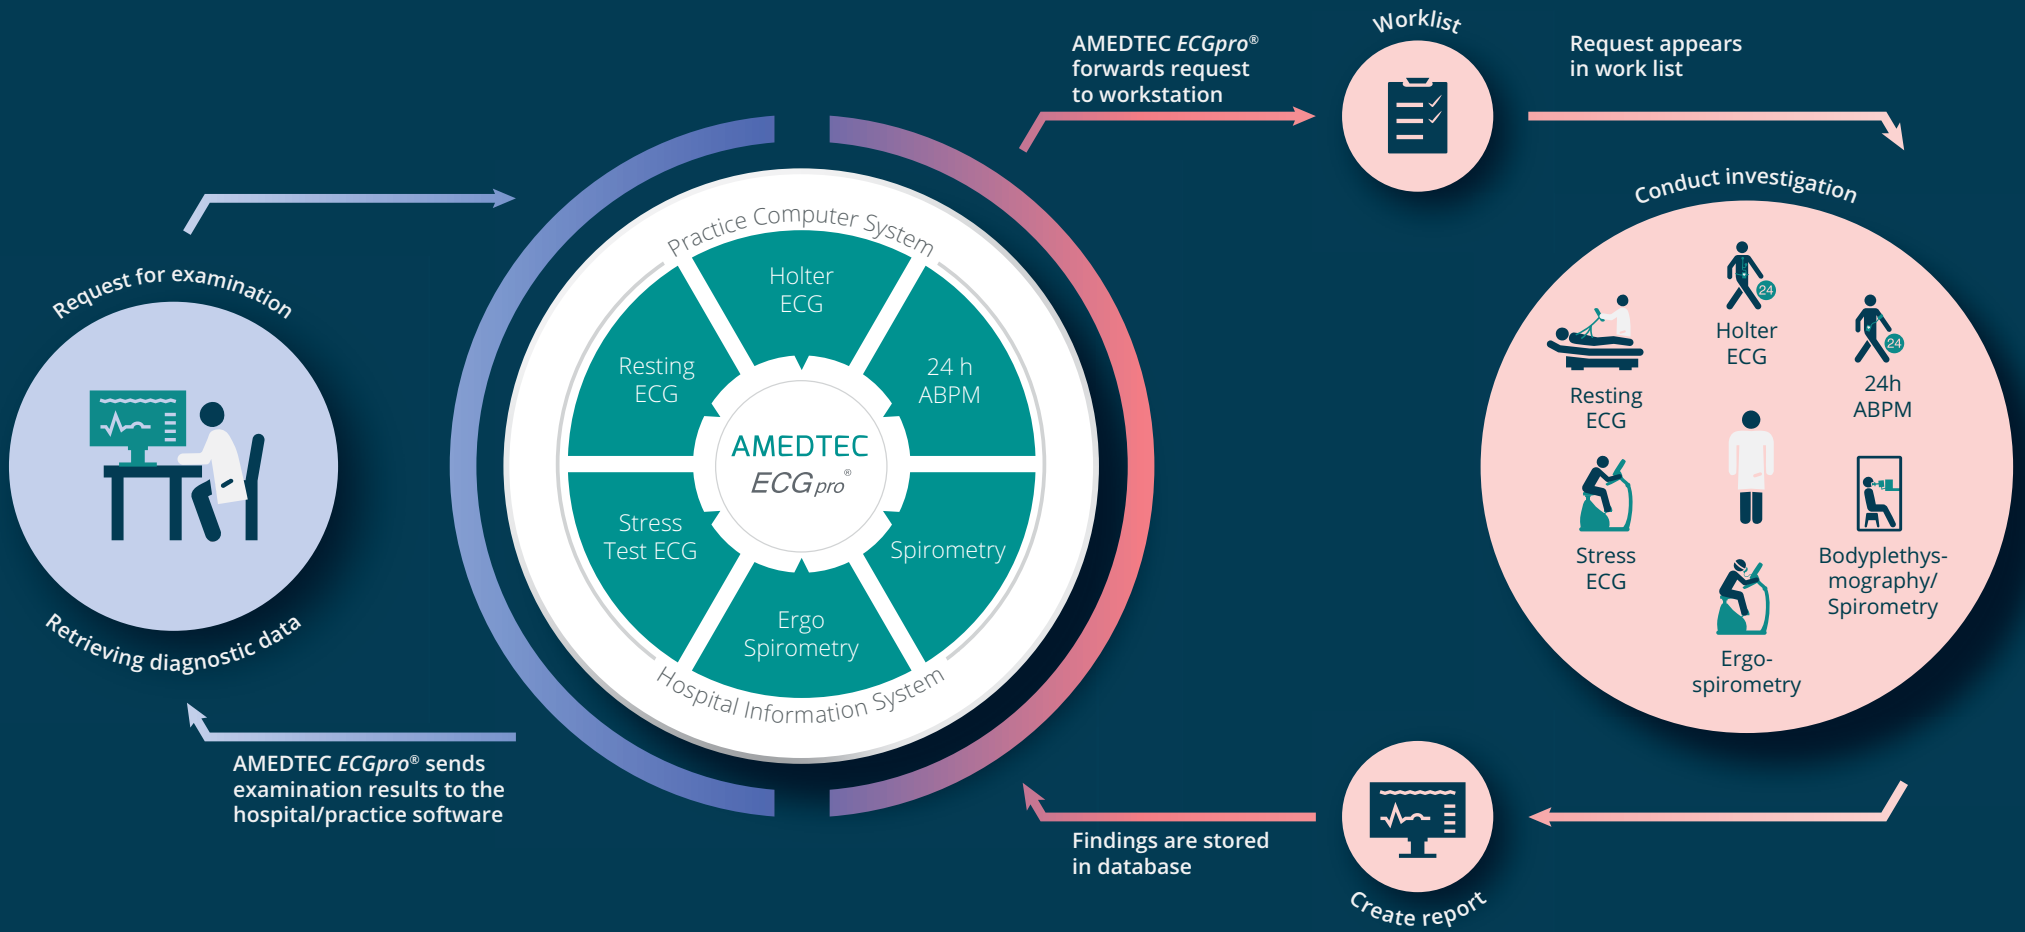
Request for examination
Retrieving diagnostic data
AMEDTEC *ECGpro*® sends examination results to the hospital/practice software
Practice Computer System
Holter ECG
24 h ABPM
Spirometry
Ergo Spirometry
Stress Test ECG
Resting ECG
AMEDTEC ECG pro®
Hospital Information System
AMEDTEC *ECGpro*® forwards request to workstation
Worklist
Request appears in work list
Conduct investigation
Resting ECG
Holter ECG
24h ABPM
Stress ECG
Ergo-spirometry
Bodyplethys-mography/ Spirometry
Findings are stored in database
Create report

CardioPart 12 WLAN Resting ECG Mobile

Ultra mobile. Robust.
Hygienic.

**Integrated into our
AMEDTEC *ECGpro*®
Data Management System.**

With the 12-lead resting ECG CardioPart 12 WLAN, AMEDTEC presents the ideal solution for mobile ECG recording. You can use the system at any location as a resting and rhythm ECG. The system automatically synchronises all the collected data immediately with the central server via the network. If no WLAN is available, the data transfer with the server can also take place via LAN connection as soon as the CardioPart 12 WLAN is positioned in the charging cradle.

- compact and easy to disinfect, which guarantees mobility and hygiene in routine use
- Robust precision measuring technology for everyday clinical and practice use with wireless transmission via WLAN
- Integrated barcode scanner for convenient and accurate patient data assignment
- Excellent for paperless workflow, including mobile requirement lists
- Automatic ECG interpretation
- Seamless integration into HIS/PACS or practice computer systems

Sampling rate	16 kHz on each of the 10 electrodes
A/D converter	24-bit ADU
Resolution	1 µV/LSB [0.01 mm]
Pacemaker detection	Digital monitoring of all the electrodes
Electrode test	ECG preview, frequency analysis
Connection of patient cable	15-pin SUB-D for 10-wire patient cable
Display	High-resolution 12.7 cm (5“) OLED touch screen display
Network ports	WLAN (802.11b/g/n, 2.4 GHz), LAN (10/100Mbit, RJ45)
Barcode scanner	1D barcodes and 2D matrix codes (QR code)
Classification	Risk class IIa
Power supply	ECG device: Internal rechargeable lithium-ion battery, up to 6 hours of ECG recording, charging via docking station
Applied part	Type CF, defibrillation-protected with associated patient cable
Dimensions, weight	ECG device approx. 160 mm × 80 mm × 25 mm (L × W × H), approx. 330 g



Barcode scanner



Order list


Electrode placement



Stat ECG

ECG measurement

CardioPart 12
Resting ECG Compact

Wireless or USB bound

**Integrated into our
AMEDTEC *ECGpro*®
Data Management System.**

Whether it's an automatic 10-second resting check or extended rhythm recordings, the CardioPart 12 Resting ECG is ideally suited for both function diagnostics and mobile use. The validated HES® algorithm is used for interpreting measurement results.

- Precision technology for everyday clinical and practice use, available with optional wireless transmission.
- One-key operation
- Quality control of the recording is performed before each ECG.
- Excellent for paperless workflow, including mobile requirement lists
- Automatic ECG interpretation
- Seamless integration into HIS/PACS or practice computer systems
- Robust, mobile equipment cart including drawer, storage basket and scanner
- Optional DT80/DT100 vacuum system from Strässle available

	CardioPart 12 USB	CardioPart 12 Blue
Sampling rate	8 kHz on each electrode	8 kHz on each electrode
Resolution	1 µV/LSB [0.01 mm]	2.4 µV/LSB [0.02 mm]
Pacemaker detection	Digital monitoring of all electrodes	Digital monitoring of all electrodes
Input protection	Defibrillator pulse protection [1)]	Defibrillator pulse protection [1)]
Patient cable connection	15-pin D-sub connector	15-pin D-sub connector
Classification	Risk class IIa	Risk class IIa
Applied part	Type CF	Type CF
PC interface	USB 2.0 connector type A, 5 m USB cable	Bluetooth 2.0 Class 1 or 2
Power supply	From the USB port of the PC	2x Mignon (AA) / rechargeable NiMH
QRS trigger	LPT port of the PC	433.9 MHz SRD radio transmitter[2)]
Dimensions	101 mm × 64 mm × 28 mm	117 mm × 68 mm × 28 mm
Weight	Approx. 90 g	Approx. 160 g

	Supported HIS, PACS and BDT/GDT communication	CardioPart 12 Blue/USB	CardioPart 12 Blue/USB-P (specifically for medical practices)
	GDT	+	+
	HL7/DICOM	+ (Optional)	
	Available ECG options		
m	Resting ECG with automatic measurement	+	
mr	Resting ECG with automatic measurement and rhythm ECG	+	+
i	Resting ECG with automatic measurement, interpretation and rhythm ECG	+	+
s	Resting and stress ECG with measurement, interpretation and rhythm ECG, ST measurement, control of ergometers and blood pressure monitors	+	+
as	Resting and stress ECG with measurement, interpretation and rhythm ECG, ST measurement, arrhythmia analysis, control of ergometers and blood pressure monitors	+	

1) The patient cable or suction electrode system must have a protective resistance of 10 kOhm in each electrode line.
2) only for version T

Electrode placement monitoring

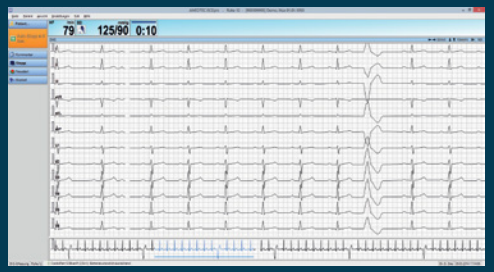
ECG recording

Results

CardioPart 12 Stress ECG

Simple. Safe.
Reliable.

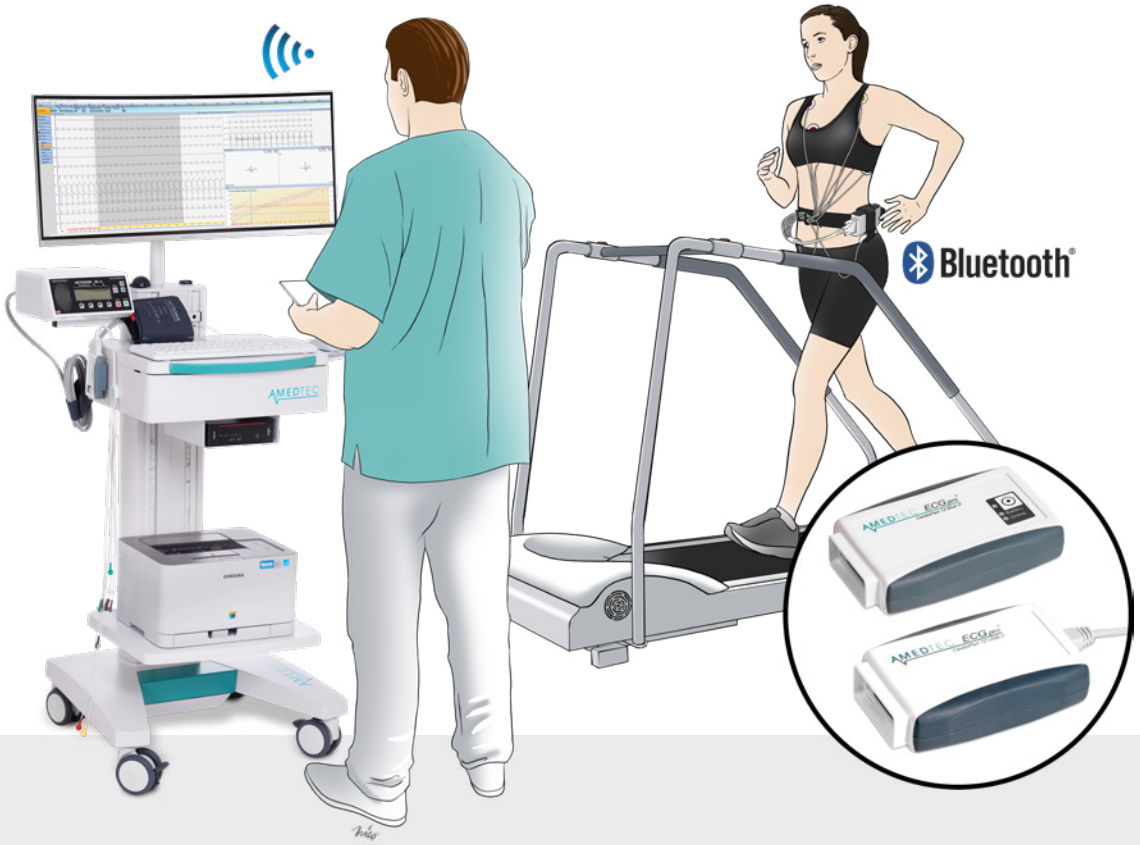

Integrated into our AMEDTEC *ECGpro*® Data Management System.

The CardioPart 12 Stress ECG offers intuitive operation, exceptional precision and the flexibility desired by users. Automatic ST, HR and rhythm measurement takes place during ECG acquisition. Current cardiac results appear immediately in a separate arrhythmia window.

- CardioPart 12 ECG recording device with USB or Bluetooth connection
- Optional control of treadmill or bicycle ergometer and stress echo couch from one measuring station
- One-button operation; simple interface guides the user step-by-step through the program.
- before and during the entire examination: Automatic quality control of each electrode
- Automated stress ECG workflow; no interaction by the operator necessary
- Retrospective view of the entire 12-lead ECG; anomalies analysed in context
- Automatic report; editable, predefined text blocks
- Own configuration of different diagnostic programs
- Individual load profile creation for bicycle and treadmill ergometry, either as step or ramp profiles.
- Wide selection of print formats; can be expanded to any format

	CardioPart 12 USB	CardioPart 12 Blue
Sampling rate	8 kHz on each electrode	8 kHz on each electrode
Resolution	1 µV/LSB [0.01 mm]	2.4 µV/LSB [0.02 mm]
Pacemaker detection	Digital monitoring of all electrodes	Digital monitoring of all electrodes
Input protection	Defibrillator pulse protection [1)]	Defibrillator pulse protection [1)]
Patient cable	15-pin D-sub connector	15-pin D-sub connector
Classification	Risk class IIa	Risk class IIa
Applied part	Type CF	Type CF
PC interface	USB 2.0 connector type A, 5 m USB cable	Bluetooth 2.0 Class 1 or 2
Power supply	From the USB port of the PC	2x Mignon (AA) / rechargeable NiMH
QRS trigger	LPT port of the PC	433.9 MHz SRD radio transmitter[2)]
Dimensions	101 mm × 64 mm × 28 mm	117 mm × 68 mm × 28 mm
Weight	Approx. 90 g	Approx. 160 g

	Supported HIS, PACS and BDT/GDT communication	CardioPart 12 Blue/USB	CardioPart 12 Blue/USB-P (specifically for medical practices)
	GDT	+	+
	HL7/DICOM	+ (Optional)	
	Available ECG options		
m	Resting ECG with automatic measurement	+	
mr	Resting ECG with automatic measurement and rhythm ECG	+	+
i	Resting ECG with automatic measurement, interpretation and rhythm ECG	+	+
s	Resting and stress ECG with measurement, interpretation and rhythm ECG, ST measurement, control of ergometers and blood pressure monitors	+	+
as	Resting and stress ECG with measurement, interpretation and rhythm ECG, ST measurement, arrhythmia analysis, control of ergometers and blood pressure monitors	+	

1) The patient cable or suction electrode system must have a protective resistance of 10 kOhm in each electrode line.
2) only for version T

AMEDTEC ECG pro®

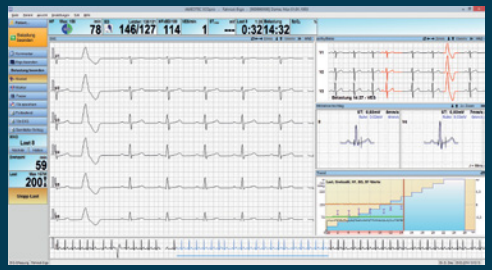

Ongoing stress test with arrhythmia detection

Rhythm overview

Results table and summary

Holter EP8 Long-Term ECG

Holter ECG analysis without compromises

Integrated into our AMEDTEC *ECGpro*® Data Management System.

Recordings of more than 7 days require certain product features: Comfortable to wear, robust exterior, low weight and excellent signal quality. Even under demanding measuring conditions, the AMEDTEC *ECGpro*® Holter ECG EP8 delivers precise data. The backbone of the evaluation software is accurate analysis algorithms. Specially developed pediatric programs enable child-friendly ECG interpretation.

- Automatic patient assignment when importing the recording
- Multi-day full-disclosure recording without data reduction or compression deficits
- Rhythm analysis using parameters that can be configured specifically for ECGs
- Intelligent pacemaker analysis
- Differentiation between atrial and ventricular pacing spikes
- Risk management using ischaemia, QT and HRV analysis
- Detection of atrial arrhythmias
- Creation of automatic reports that can be edited and configured

Dimensions	Size	80 mm × 59 mm × 18 mm (L × W × H)
	Weight	63 g
	Operating position	Any orientation
Electrical data	Patient cable	4-, 5-, or 10-wired
	Battery type	1 AA battery: Alkaline, lithium or NiMH
	Applied part	Type CF
Function	Recording channels	3 or 12
	Sensitivity	2.5 µV/LSB
	AD resolution	24 bit
	Recording	Full-disclosure, continuous
	Data transfer	USB 2.0 or card reader
	Sample rate	250/s, 500/s or 1000/s
	Frequency range	0.05 to 240 Hz
	Display	OLED colour display
	Pacemaker detection	Permanently
	Protection against water	Class IPX6
	Recording time	3-channel recording: > 7 days 12-channel recording: 2 days

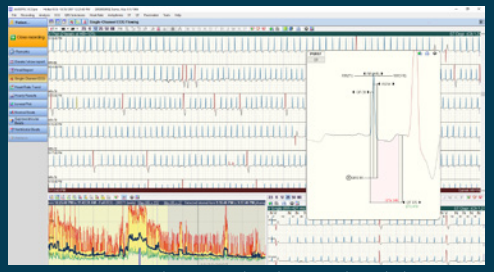

Continuous ECG with HR trend and zoomed single beat

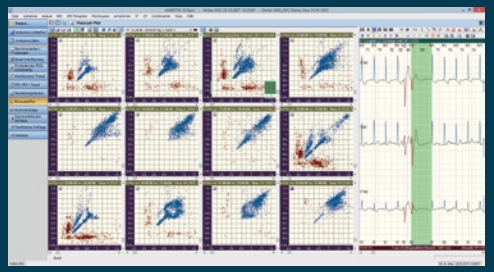

Heart Rate Variability (HRV)

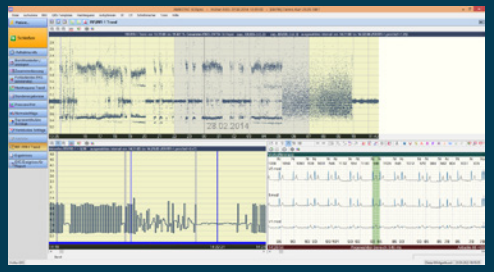

Rapid detection of atrial arrhythmia

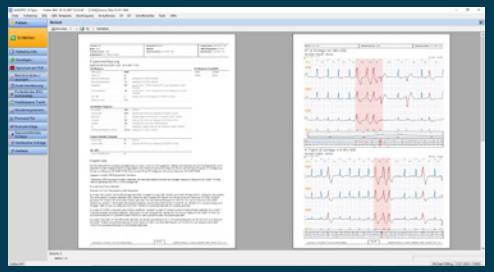

Report creation

Holter-RR
24h ABPM

Non-invasive blood pressure monitoring

**Integrated into our
AMEDTEC *ECGpro*®
Data Management System.**

Meaningful data: The Holter-RR guarantees reliable, ambulatory blood pressure monitoring. The Auto Feedback Logic (AFL) allows quiet, fast readings with low cuff pressure. Threshold tables for children and young people are integrated for precise interpretation.

- Multi-day recording (up to 72 hours)
- Comparison of various test series
- Definition of multiple day and night intervals
- Fast, convenient preparation of the recorder
- Automatic patient assignment when importing the recording
- Validated in accordance with the European Society of Hypertension (ESH International Protocol) and the British Hypertension Society (BHS - AA rating)
- Integration of limit tables for children/adolescents

Pressure measurement range	Systolic 60 to 290 mmHg Diastolic 30 to 195 mmHg
Accuracy	+/- 3 mmHg in the indicated range
Static pressure range	0 to 300 mmHg
Pulse range	30 to 240 beats per minute
Measurement method	Oscillometric
Measurement intervals	0, 1, 2, 3, 4, 5, 6, 10, 12, 15, 20 or 30 measurements per hour
Monitoring protocols	2 programmable and 7 fixed protocols
Storage capacity	300 measurements
Operating temperatures	+10 °C to +40 °C
Operating humidity	15 % to 90 %
Dimensions	128 mm × 75 mm × 30 mm
Weight	Approx. 240 g incl. rechargeable batteries
Power supply	2 Mignon AA alkaline or rechargeable batteries
Interfaces	USB or serial (RS232) cable

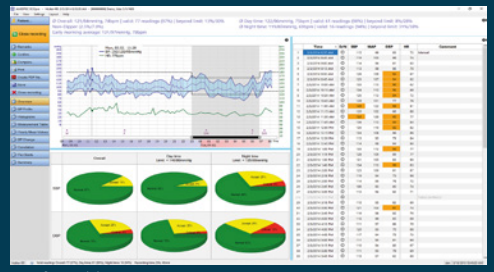

Configurable overview

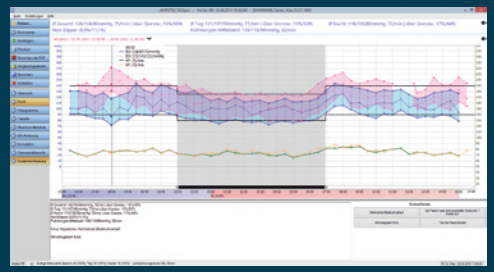

Test series comparison

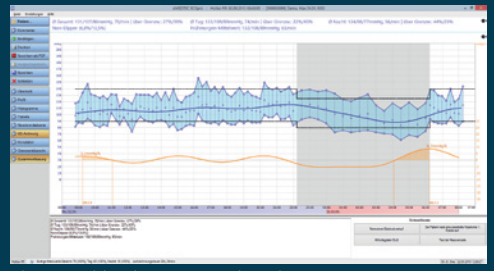

Change in blood pressure with early morning rise

Ergostik
Ergospirometry

Intuitive operation makes
the difference

**Integrated into our
AMEDTEC *ECGpro*®
Data Management System.**

The Ergostik cardiopulmonary exercise testing (CPET) system is setting new standards in ergospirometry. Thanks to the intuitively operable software, the examination is greatly facilitated. The combination of the AMEDTEC *ECGpro*® Stress ECG, the extremely lightweight flow sensor and the stable O_2/CO_2 sensors ensures meaningful measurements.

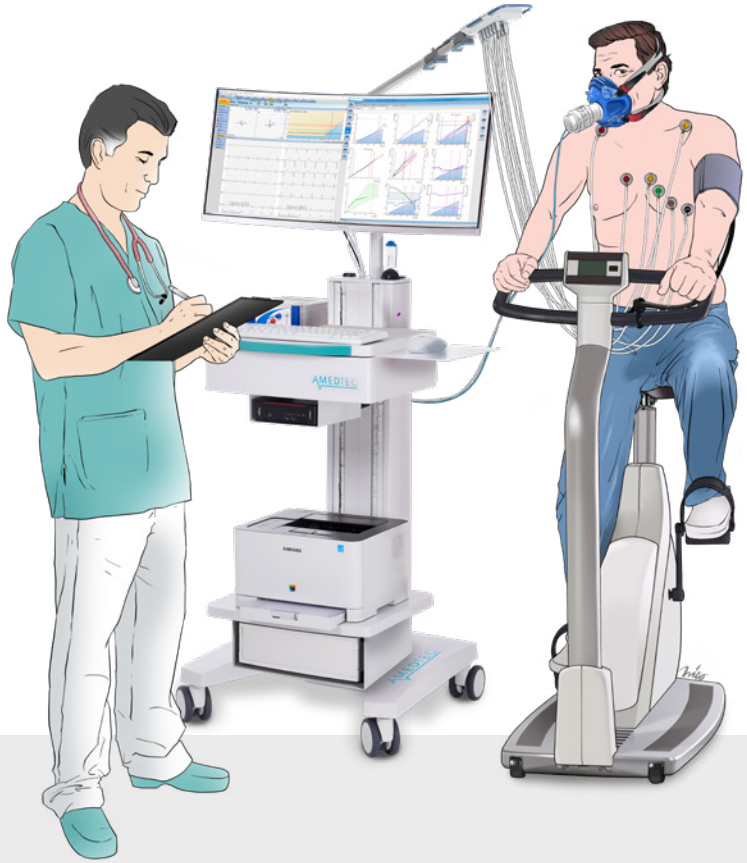

- Compact, portable ergospirometry system with breath-by-breath technology
- Ultra-light, easily disinfectable flow sensor
- 12-lead resting and stress test ECG with USB or Bluetooth connection
- Automatic BTPS adjustment of temperature, air pressure and air humidity
- Fully-integrated oxygen saturation via Bluetooth connection (optional)
- 9-plot graph according to Prof. Wasserman; each field can be zoomed
- Automatic detection of ventilatory thresholds VT1, VT2 simultaneously according to 5 criteria; even during the examination
- Optional control of treadmill, ergometer and stress echo couch from one measuring station
- Retrospective view of the entire 12-lead ECG possible

Dimensions	Size	210 mm × 175 mm × 75 mm (L × W × H)
	Weight	1120 g
Electrical data	IP protection type	IPX0 IEC 529
	Classification	IIa
	Applied part	Type BF according to VDE 0750 (DIN EN 60601-1)
	PC interface	USB 2.0
	Power input	< 60 VA
Flow measurement	Flow sensor	Ergoflow
	Measurement principle	Differential pressure
	Measurement range	+/- 16 l/s
	Ventilation measurement range	0 – 300 l/min
	Resistance	< 0.12 kPa/(l/s) < 14 l/s
	Effective dead space	< 32 ml
	Sampling rate	125 Hz
	Accuracy	+/- 3 % or 50 ml/s
Volume measurement	Measurement range	0 – 20 l
	Accuracy	+/- 3 % or 50 ml
O_2 analyser	Measurement principle	Electro chemical cell
	Measurement range	1-100 % O_2
	Accuracy	+/- 0.1 vol% (13 % - 21 %) / +/- 1% FS
	t10-90	< 90 ms (after filtering)
CO_2 analyser	Measurement principle	Infrared absorption
	Measurement range	0 - 13 % CO_2
	Accuracy	+/- 0.1 vol% (2.5 % - 7.5 %)
	t10-90	< 90 ms (after filtering)

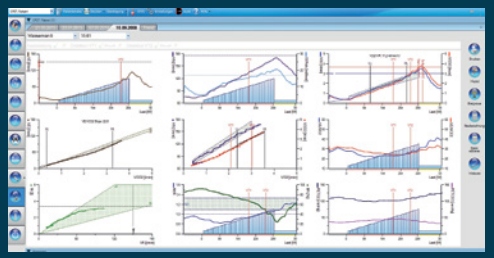

Wasserman 9-plot graph

Threshold display

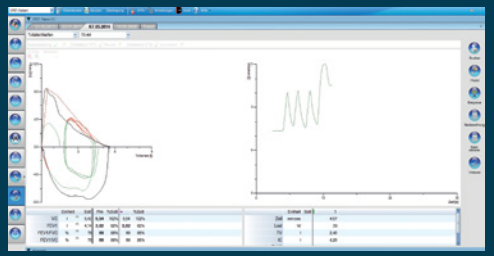

Intrabreath display

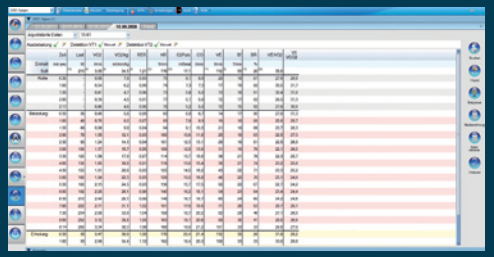

Table report

Spirostik Spirometry

Innovative and reliable

Integrated into our AMEDTEC *ECGpro*® Data Management System.

By using disposable flow sensors, the wireless version Spirostik Blue as well as the USB-based version Spirostik Blueflow guarantee maximum patient safety. Together with the intelligent software platform, examination processes are enormously simplified. The user is offered the greatest possible operating comfort.

- Bluetooth and USB version; ideal for mobile use
- Calibrated disposable flow sensors with anatomically shaped mouthpiece
- Roll-in handle; quick and safe change of the flow sensor
- Extremely low dead space; suitable for testing small children
- Low resistance; comfortable for patients
- Complies with the ERS/ATS guidelines

Measurements	Test programs	SVC, F/V, MVV
	Test procedures	Single, pre/post
	Options	Bronchoprovocation, breathing pattern analysis
Interpretation	Diagnosis	(Semi-)automatic according to ATS/ERS 2005 Proprietary interpretation graph
	Quality control	Acceptability and reproducibility according to newest ATS/ERS guidelines
	Predicted sets	GLI 2012, GLI 2017, GLI 2020, GLI 2022, ECCS 1993, NHANES III, Zapletal and more
	Predicted representations	Predicted, LLN, ULN, % Predicted, Z-Score
Measuring electronics	Dimensions	210 mm × 175 mm × 75 mm (L × W × H)
	PC interface	Bluetooth 4.0
	Power supply	2 × AA (HR6 / LR6)
	Sampling rate	125 Hz
	Software	BLUE CHERRY® (requires Windows 7 SP1 or newer)
Flow sensor	Measurement principle	Differential pressure (Blueflow)
	Measurement range	+/- 16 l/s
	Accuracy	+/- 3 % or 50 ml/s, all ATS/ERS specifications
	Dead space	< 50 ml (effective)
	Resistance	< 0.07 kPa/(l/s) < 14 l/s

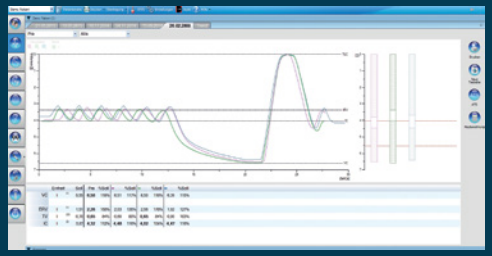

Spirometric view

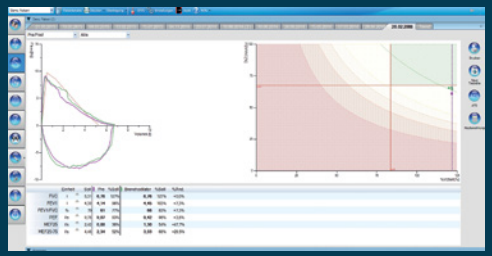

Flow/volume view with interpretation chart

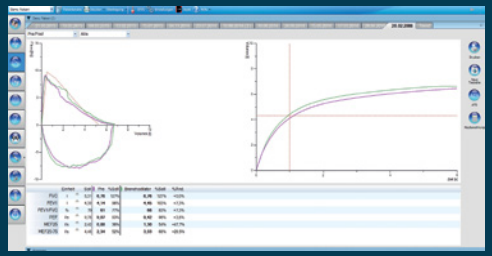

Flow/Volume View

Bodystik Bodyplethysmography

Lung function diagnostics with patient comfort

Integrated into our AMEDTEC *ECGpro*® Data Management System.

Innovative, robust and glazed on all sides: The aluminium cabin is equipped with an electrically adjustable 3D stand, a swivelling patient chair and an electromagnetic door lock. The low entry height facilitates access and qualifies the Bodystik for clinical and outpatient diagnostics.

- Electrically height-adjustable 3D stand; maximum operating comfort even during measurement
- Swing-out seat for patients; easy access for patients with disabilities
- Revolutionary flow sensor; extremely small dead space
- Fully automatic cabin calibration
- Automatic BTPS compensation for temperature, air pressure and humidity
- Complies with the latest ERS/ATS guidelines
- Configurable, automatic test sequence; saves time and money

Measurements	Test programs	SVC, F/V, FRC, MVV
	Test procedures	single, pre/post, broncho provocation
	Options	CO-diffusion, MIP/MEP, Compliance, Rocc/Rint
Interpretation	Diagnosis	(Semi-)automatic according to ATS/ERS 2005 Proprietary interpretation graph
	Quality control	Acceptability and reproducibility according to newest ATS/ERS guidelines
	Predicted sets	GLI 2012, GLI 2017, GLI 2020, GLI 2022, ECCS 1993, NHANES III, Zapletal and more
	Predicted representations	Predicted, LLN, ULN, % Predicted, Z-Score
Measuring electronics	PC interface	USB 2.0
	Power supply	100 - 240 V / 50 - 60 Hz / max. 100 VA
	Software	BLUE CHERRY® (requires Windows XP SP2 or newer)
Cabin	Principle	Volume constant
	Dimensions	950 mm × 850 mm × 1730 mm (L × W × H cabin, door closed)
Sensors	Flow	Differential pressure (Ergoflow) +/- 16 l/s, accuracy meets all ATS requirements
	Cabin pressure	Mass flow measurement +/- 0.25 kPa, accuracy +/- (1.5 % MV + 1.5 % FS)
	Mouth pressure	Semiconductor +/- 25 kPa, accuracy +/- 0.25 % FS

Bodyplethysmography view

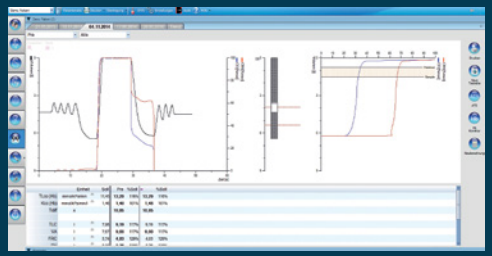

CO-diffusion view

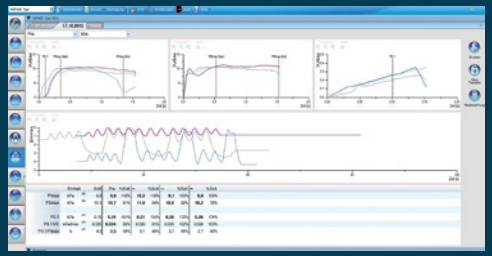

MIP/MEP view

The AMEDTEC maintenance contract

Take advantage of the benefits of regular, professional inspections.

Permanent assurance of product quality

National regulations require owners of medical devices to perform regular technical safety inspections and metrological control.

AMEDTEC carries out these examinations in accordance with DIN EN 62353 (VDE 0751-1).

Prevention is better than repair

A regular look at your hardware and software minimizes technical defects or system incidents.
The AMEDTEC maintenance contract ensures this.

Here are seven good reasons to consider it:

— Information about new versions/updates
— Free software upgrades
— Maintenance of the AMEDTEC *ECGpro*® server database
— Support via remote maintenance
— Free loan devices for interim use
— 10% discount on MTK & STK
— One free on-site visit per year

Better safe than sorry

Invest in the operational reliability and performance of your diagnostic systems. The AMEDTEC maintenance contract is an effective and reliable tool that saves your budget in the long run.

We would be happy to provide you with a personalized offer!

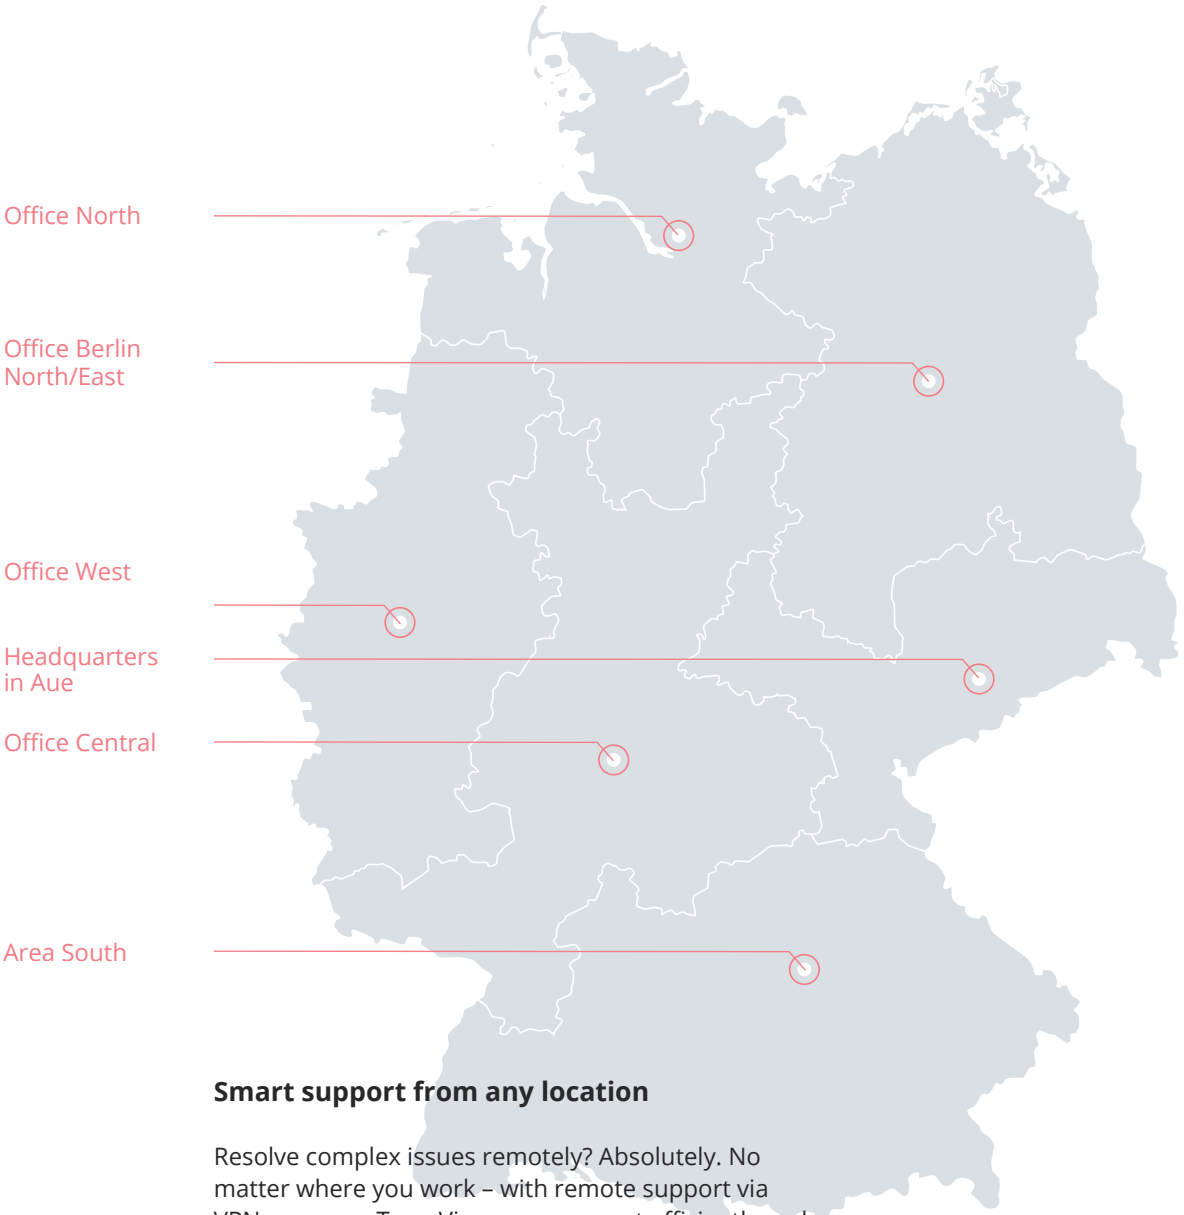

Smart support from any location

Resolve complex issues remotely? Absolutely. No matter where you work – with remote support via VPN access or TeamViewer, we can act efficiently and professionally. Additionally, we have established a comprehensive service network.
AMEDTEC is represented at six locations nationwide.

Service hotline: Mon – Fri, 8 a.m. to 5 p.m. +49 3771 59 82 750

Good to know:
Minor problems can usually be resolved over the phone.

Resolve technical problems promptly

Your diagnostic systems should work reliably at all times. If this is not the case, AMEDTEC is there for you. Our technicians take care of your problems quickly, professionally and without complications.

Replacement device during repair

Smooth operation without failures: We know what matters in practice. If more extensive repairs are necessary, you can receive a loaner device upon request. Simply send us the defective device. You can expect professional repairs.

AMEDTEC connects

MANAGE COMPLEX DATA EASILY
AMEDTEC ECG pro®

Contact and Support

AMEDTEC Medizintechnik Aue GmbH
Headquarters
Schneeberger Str. 5
08280 Aue
Germany

Phone: +49 3771 59 82 70
Fax: +49 3771 59 82 79 0
Email: service@amedtec.de

AMEDTEC Medizintechnik Aue GmbH
Office Bad Neustadt
Gartenstrasse 36
97616 Bad Neustadt an der Saale
Germany

Phone: +49 9771 63 15 50 0
Fax: +49 9771 63 15 50 8
Email: service@amedtec.de

www.amedtec.de

M0800 000-0317-2_07

Errors and omissions excepted